

■DESCRIPTION

TOA's Basic Amplifier A-1360MK2 is a high performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.


■SPECIFICATIONS

Power Source		230 V AC, 50/60 Hz	
Rated Output		360 W	
Power Consumption		350 W (IEC60065)	
Frequency Response		50 - 18,000 Hz, ±3 dB	
Distortion		Less Than 0.3% at 1 kHz, 1/3 Rated Power	
Inputs	MIC 1	-52 dBV (2.5 mV), 600 Ω, Unbalanced, Equivalent to Phone Jack	
	MIC 2	-52 dBV (2.5 mV), 600 Ω, Unbalanced, Equivalent to Phone Jack	
	MIC 3	-52 dBV (2.5 mV), 600 Ω, Unbalanced, Equivalent to Phone Jack	
	AUX 1	-10 dBV (316 mV), 10 kΩ, Unbalanced, RCA Pin Jack	
	AUX 2	-10 dBV (316 mV), 10 kΩ, Unbalanced, RCA Pin Jack	
Outputs	Speaker Out	Speaker Outputs plug in screw connector	
	Direct Line	100 V	28 Ω
		70 V	13.6 Ω
		4-16 Ω	4-16 Ω
Pre Out	0 dBV (1.0 V), 600 Ω, Unbalanced, RCA Pin Jack		
S/N Ratio		Over 65 dB (MIC 1 - MIC 3) Over 75 dB (AUX 1 - AUX 2)	
Tone Controls		Bass : ±10 dB at 100 Hz Treble : ±10 dB at 10 kHz	
Muting		MIC 1 overrides other input signals with 0 - 40 dB attenuation by voice switch of MIC 1 input level.	
Indicators		Power LED, Signal LED	
Finish		Front Panel : ABS Resin, Color Black Case : Steel Plate, Painting Black	
Dimensions		420 (W) X 110 (H) X 384 (D) in mm	
Weight		14.6 kg	
Accessory		AC Power cord (1 Pc)	


Note : \*) 0 dBV = 1.0 V  
\*\*) Specification is measured at the AC voltage of 230V.

■APPEARANCE

Rear View

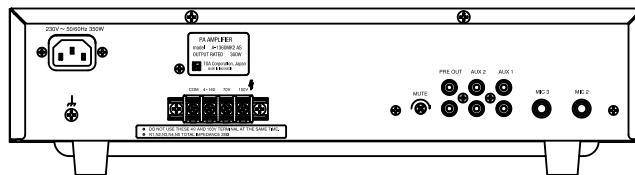

Front View

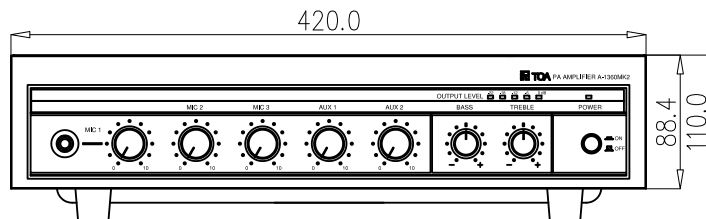

Side View



UNIT : mm SCALE : 1/5