

■DESCRIPTION

The D-921E is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with removable terminal block type connectors. Input sensitivity and phantom power setting can be performed at the main frame such as the D-901.

■SPECIFICATIONS


* 0 dB = 0.775 V

| | |
|---------------------------|---|
| Input | 2 channels, Mic/Line changeable Mic: -50/-36 dB*, 4.7 kΩ, electronically-balanced, removable terminal block (3 pins) Line: -10/+4 dB*, 10 kΩ, electronically-balanced, removable terminal block (3 pins) Phantom power supply (can be used when set for the microphone) 15 V: D-901 (option), DP-K1 (option), D-2008SP (option) 12 V: SX-2100AI (option) Ground lift switch |
| A/D Converter | 24 bit |
| Sampling Frequency | 48 kHz |
| Frequency Response | 20 Hz - 20 kHz, ±1 dB (+4 dB* input) |
| Dynamic Range | 100 dB (IHF-A weighted) or more (+4 dB* input) |
| Total Harmonic Distortion | 0.05 % or less (+4 dB* input) |
| Finish | Panel: Pre-coated steel plate, black, 30 % gloss |
| Dimensions | 35 (W) × 119.5 (H) × 178.4 (D) mm |
| Weight | 140 g |
| Accessory | Removable terminal plug (3 pins, preinstalled on the unit) ×2 |


■APPEARANCE



Top View

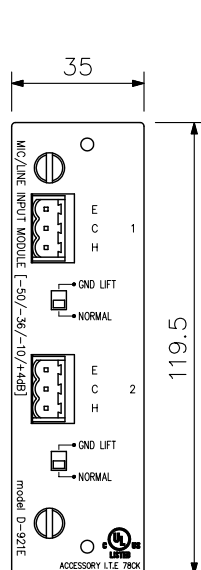

Front View

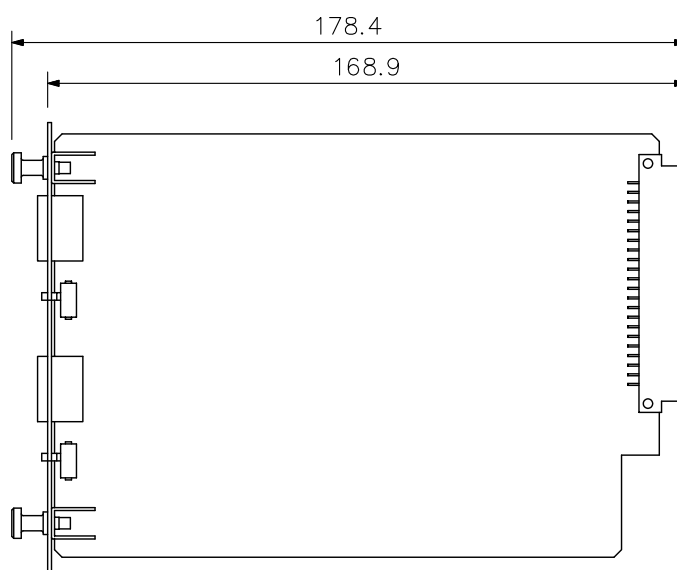

Side View

UNIT:mm SCALE:1/2