

DESCRIPTION


The D-922E is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with removable terminal block type connectors. The D-901's 4-pole DIP switch is used to set the input sensitivity, phantom power supply, and ground lifting.

SPECIFICATIONS

* 0 dB = 0.775 V

Input	2 channels, -50/-36/-10/+4 dB* (Selectable with the DIP switch.), 4.7 k Ω , electronically-balanced, removable terminal block (3 pins) Phantom power supply (can be set with the DIP switch) 15 V: D-901 (option), DP-K1 (option), D-2008SP (option) 12 V: SX-2100AI (option) Ground lift switch (can be set with the DIP switch)
A/D Converter	20 bit
Sampling Frequency	48 kHz
Frequency Response	20 Hz - 20 kHz, ± 1 dB (+4 dB* input)
Dynamic Range	85 dB (IHF-A weighted) or more (+4 dB* input)
Total Harmonic Distortion	0.2 % or less (+4 dB* input)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) $\times$ 119.5 (H) $\times$ 178.4 (D) mm
Weight	125 g
Accessory	Removable terminal plug (3 pins, preinstalled on the unit) $\times$ 2

APPEARANCE

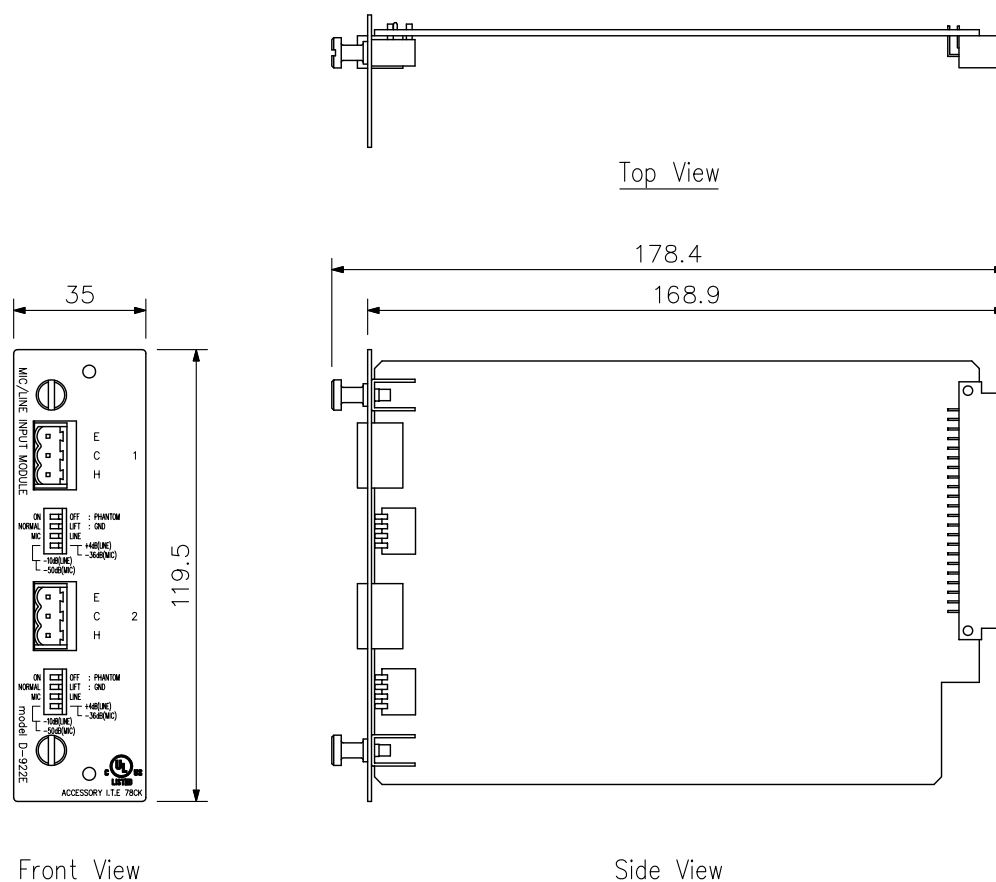

UNIT:mm SCALE:1/2