


■DESCRIPTION

The PM-222U is a close-talking microphone for making general announcements. It comes with a talk switch that can be locked. It is provided with the function to remotely control both the amplifier power and chime operation.

■SPECIFICATIONS

| | |
|--------------------|---|
| Type | Moving coil microphone |
| Directivity | Unidirectional |
| Rated Impedance | 600 Ω, balanced |
| Rated Sensitivity | -47 dB (1 kHz 0 dB = 1 V/Pa) |
| Frequency Response | 100 Hz - 10 kHz |
| Cable | 2-core shielded plus 2-core cable |
| Cable Length | 2 m (when extended) |
| Terminal | No connector |
| Talk Switch | Short-off type with lock |
| Remote Switch | Make contact (linked with talk switch) 30 V DC, 500 mA or less |
| Finish | ABS resin, gray |
| Dimensions | 44 (W) × 160 (H) × 38 (D) mm |
| Weight | 200 g |
| Accessory | Microphone holder.....1, Metal fitting.....1, Tapping screw4X16.....2 |

■APPEARANCE

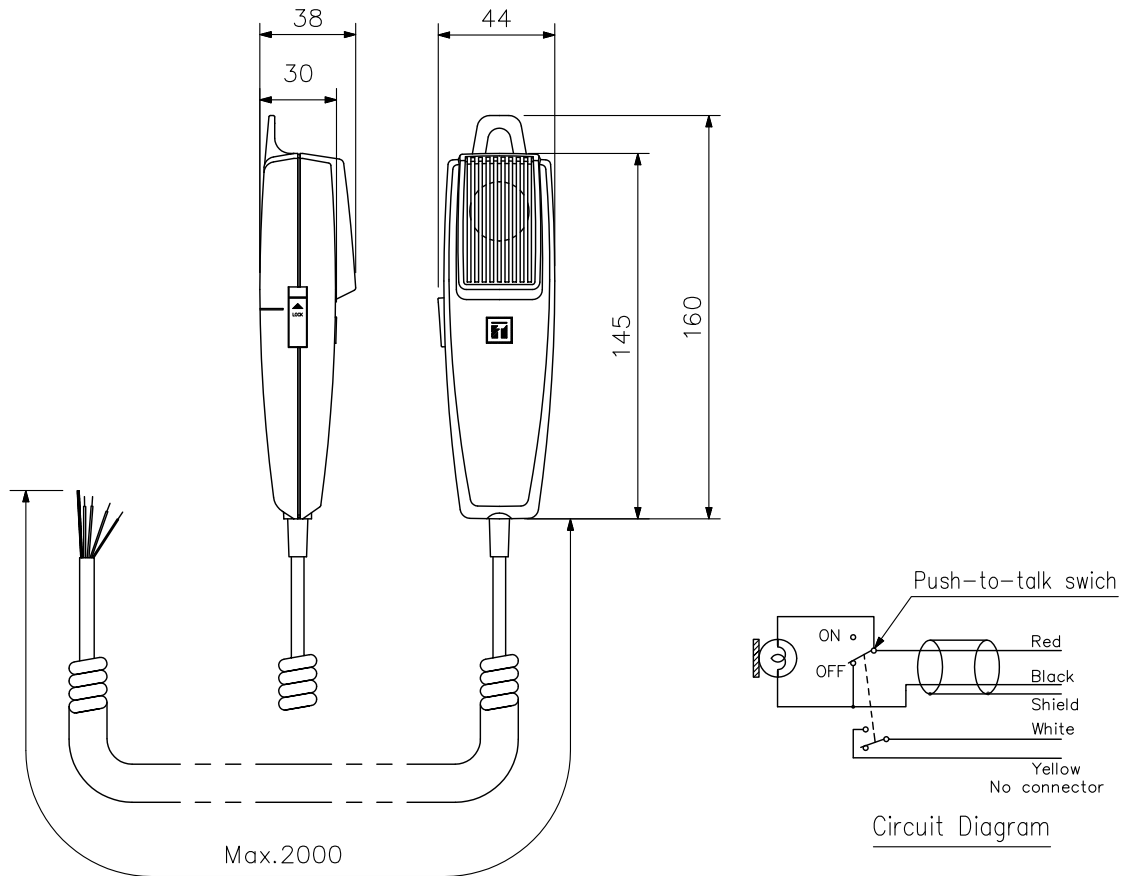

UNIT:mm SCALE:1/3