

DESCRIPTION

The PP-025B operates on 24 V DC and provides 8 inputs. Each input 1, 2 and 3 is provided with a priority circuit to allow them to override the other inputs. The optional CK-025 chime unit can be built-in the panel.


SPECIFICATIONS

* 0 dB = 1 V


Power Source	24 V DC
Power Consumption	200 mA or less
Inputs	Input 1-A: -2/-62 dB*, 600 Ω, balanced, Ø6.3 mm phone jack (2P) Input 1-B: -2 dB*, 600 Ω, balanced, Ø6.3 mm phone jack (2P) Input 2-A: -2/-62 dB*, 600 Ω, balanced, Ø6.3 mm phone jack (2P) Input 2-B: -2 dB*, 600 Ω, balanced, Ø6.3 mm phone jack (2P) Input 3-A: -2 dB*, 20 kΩ, unbalanced, Ø6.3 mm phone jack (2P) Input 3-B: -2 dB*, 20 kΩ, unbalanced, Ø6.3 mm phone jack (2P) Input 3-C: -2/-22 dB*, 50 kΩ, unbalanced, Ø6.3 mm phone jack (2P)/RCA pin jack Input 3-D: -22 dB*, 50 kΩ, unbalanced, RCA pin jack
Outputs	Line out 1: 0 dB*, 600 Ω, balanced, all inputs (Inputs 1/2 are output when using the line out 2.), Ø6.3 mm phone jack (2P) Line out 2: 0 dB*, 600 Ω, unbalanced (Input 3 is output.), Ø6.3 mm phone jack (2P) Rec out : -10 dB*, 5 kΩ, unbalanced, all inputs (Inputs 1/2 are output when using the line out 2.), RCA pin jack
Frequency Response	50 Hz - 15 kHz ±3 dB (at 1 kHz)
Tone Control	100 Hz, 10 kHz ±10 dB
Signal to Noise Ratio	60 dB or more
Distortion	1 % or less
Priority	Priority order: Input 1 > Input 2 > Input 3 Priority signal: Input level
Finish	Panel: Pre-coated steel plate, black, 30%, gloss
Dimensions	482 (W) × 88.4 (H) × 218 (D) mm
Weight	3 kg
Accessory	Phone plug/phone plug connection cord (balanced)1, Power supply cable1, Rack mounting screw (with washer)4, Rack mounting bracket (preinstalled on the unit)2, Input indication label1, 5P DIN plug1
Option	Chime unit: CK-025

APPEARANCE


Rear View

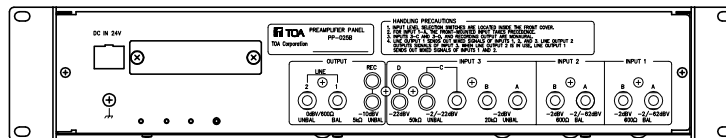


Front View

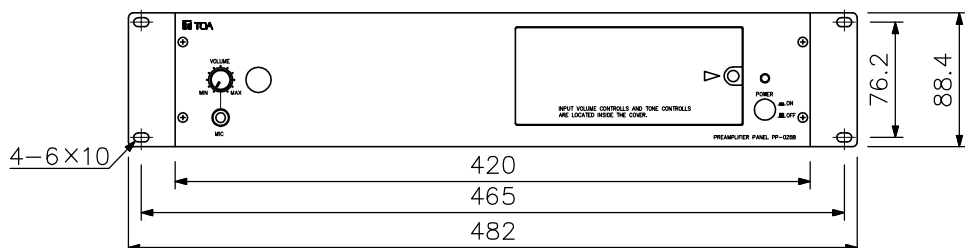

PP-025B without the front cover

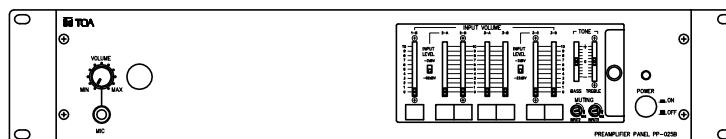

Side View

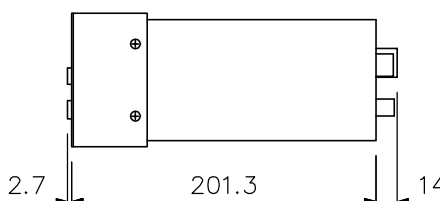

UNIT: mm SCALE: 1/5