

DESCRIPTION


TOA speaker selector SS-1010 is a 10 input Zone and 1 input Emergency Override speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

SPECIFICATIONS


Voltage Source		24 V DC
Current Consumption		0.4 A DC
Inputs		10 Inputs Zone 1 Emergency Override
Output		10 Outputs Zone, Each output max 480W
Controls	Front	10 Zone Selectors 1 All Zone Selector for All Zone
	Rear	1-10 Zone Controls In
		All Zone Control In for All Zone
Indicator Led		10 Zone Selector LEDs 1 All Zone LED
Operating Temperature		0°C to +40°C
Finish		Front Panel : Aluminum Hair Line, Etching Black Case : Steel Plate, Painting Black
Dimensions		420 (W) X 44 (H) X 320 (D) in mm
Weight		3.2 kg
Accessories		6P Connectors (12 Pcs) 2P Connector (1 Pc)

APPEARANCE


Rear View

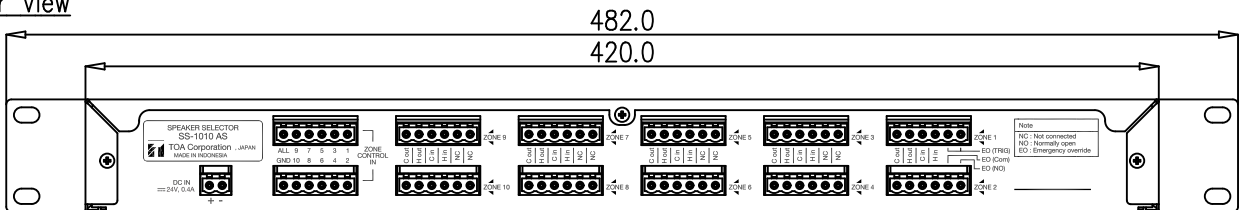

Front View

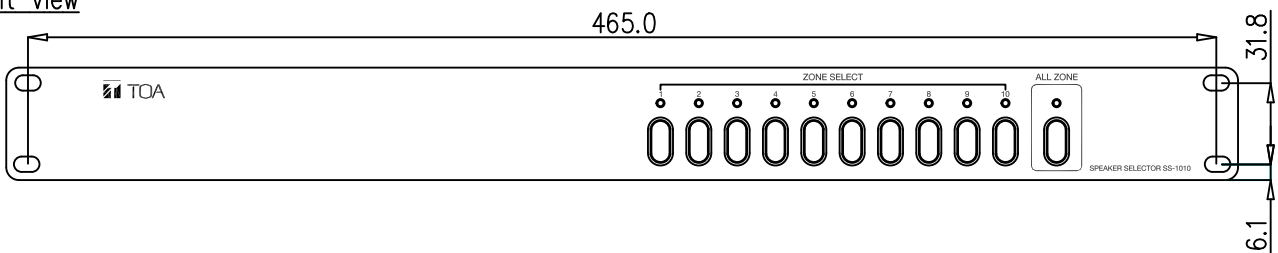

Side View

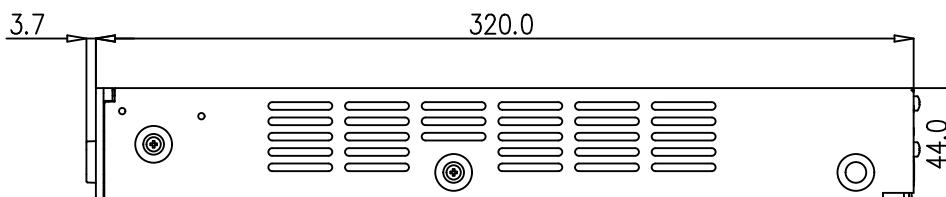

UNIT : mm SCALE : 1/3