

**DESCRIPTION**

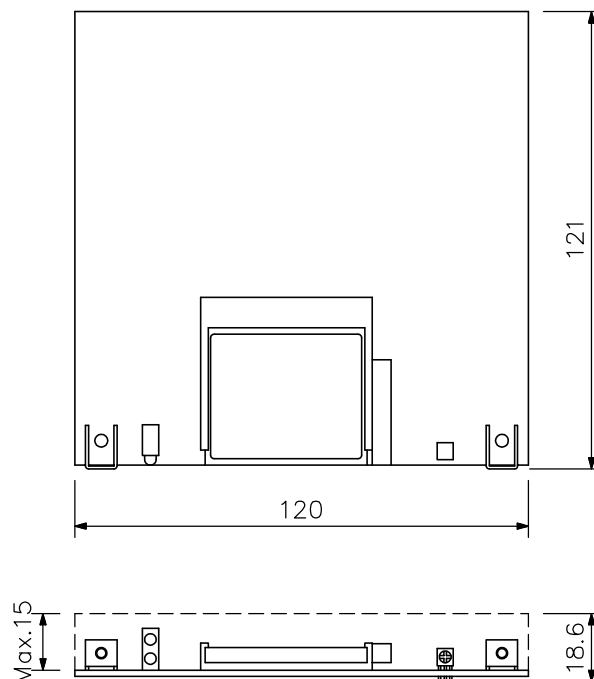
The EV-200M is a playback-only Voice Announcing board to play back the messages recorded on The EV-350R. The EV-200M is designed to be built in the VM-2000 series amplifiers and VX-2000 system.

**SPECIFICATIONS**

\* 0 dB = 1 V

Power Source	24 V DC, 0.2 A
Power Consumption	5 W
Output	0 dB*
Frequency Response	20 - 20,000 Hz (44.1 kHz sampling) 20 - 14,000 Hz (32 kHz sampling)
Distortion	Under 0.3 % (44.1 kHz, recording method: Extremely High)
Playback Mode	Single source playback
No. of Playback Program	8 programs
Operating Temperature	0°C to +50°C
Operating Humidity	Under 90% RH (no condensation)
Dimensions	120 (W) × 18.6 (H) × 121 (D) mm
Weight	120 g
Accessory	Mounting screw ∅2, CompactFlash card (128 MB, preinstalled on the unit) ∅1

Notes: Use the CompactFlash card adapter on the market for recording by the EV-350R.

**APPEARANCE**


UNIT:mm SCALE:1/2