

## DESCRIPTION



The ZM-9002 is a remote control switch/volume panel used with the 9000 series amplifiers. It adds 4 amplifier control inputs and 1 remote volume control, and can be mounted in an American Standard 1-gang electrical box in the wall.

## SPECIFICATIONS

Applicable Cable	Single conductor shielded cable
Line Resistance	50 Ω or less (per line)
Terminal	M3 screw terminal, distance between barriers: 7.62 mm
Operating Temperature	-10°C to +40°C
Finish	Surface-treated steel plate, white, paint
Dimensions	72 (W) × 127 (H) × 56 (D) mm
Weight	170 g
Accessory	Box mounting screw (No.6-32UNC × 30) ...2, Box mounting screw (M4 × 30) ...2, Panel mounting screw ...2

Note: Since no electrical box is supplied with the unit, prepare it separately.

## APPEARANCE

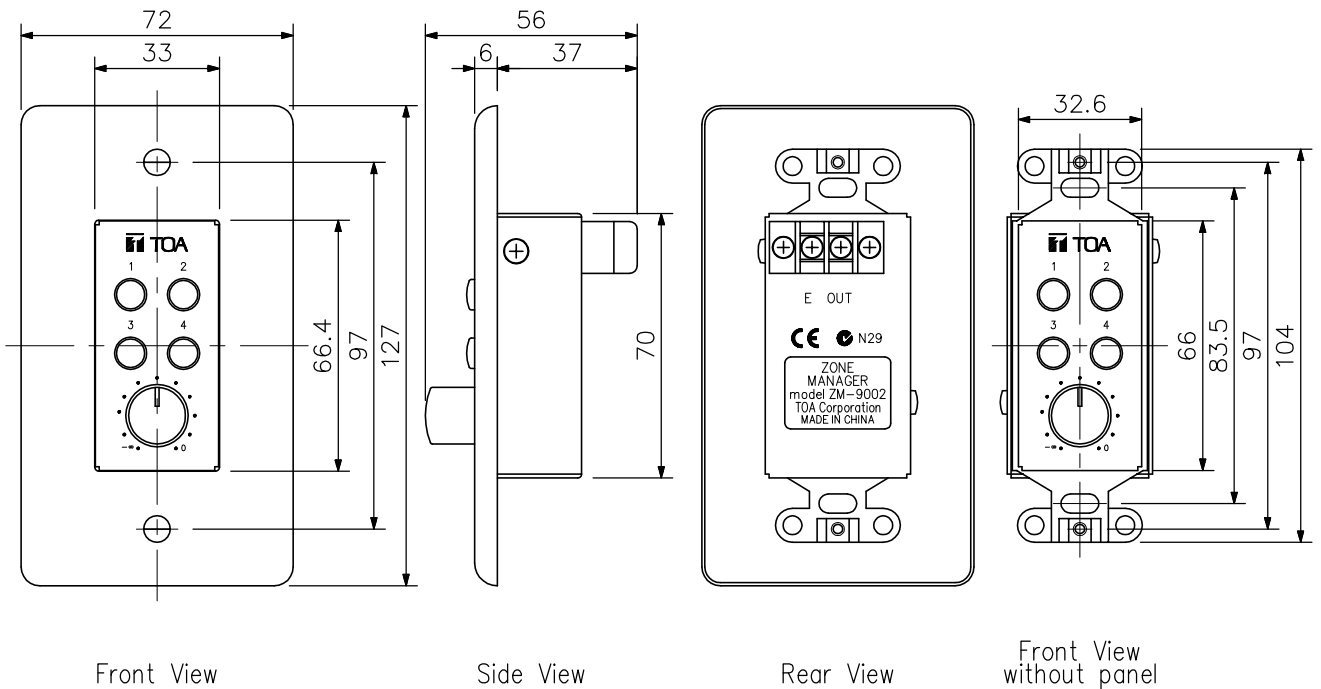

Bottom View

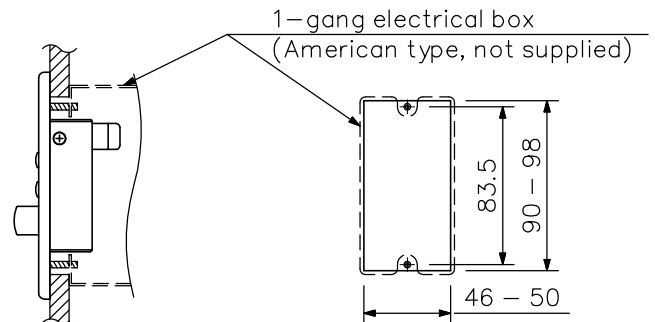


Figure when mounted

Dimensions of mounting opening

If the opening is too small or too large, the ZM-9002 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/2